

Compressible Flow - TME085

Lecture 13


Niklas Andersson

Chalmers University of Technology
Department of Mechanics and Maritime Sciences
Division of Fluid Mechanics
Gothenburg, Sweden

niklas.andersson@chalmers.se




Overview

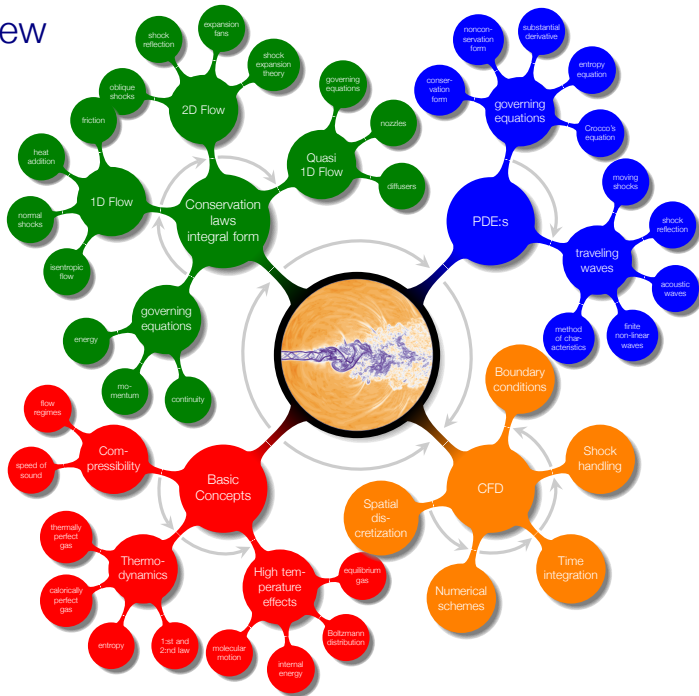

Chapter 12

The Time-Marching Technique





method of characteristics

finite non-linear waves

Boundary conditions

Shock handling

Time integration

Numerical schemes

Spatial discretization

equilibrium gas


Boltzmann distribution

CFD

Addressed Learning Outcomes

- 12 **Explain** the main principles behind a modern Finite Volume CFD code and such concepts as explicit/implicit time stepping, CFL number, conservation, handling of compression shocks, and boundary conditions
- 14 **Analyze** and **verify** the quality of the numerical solution
- 15 **Explain** the limitations in fluid flow simulation software

what about boundary conditions?

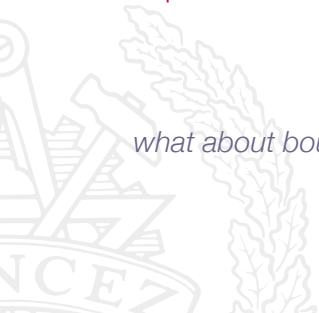

Spatial Discretization - Summary

1. Primary variables defined for all cells

$$\left\{ \bar{\rho}, \overline{(\rho u)}, \overline{(\rho e_o)} \right\}_i, i \in \{1, 2, \dots, N\}$$

2. Flux terms and lower-order terms may be computed

3. **Temporal derivatives of the primary variables** are defined for all cells

$$\left\{ \frac{d}{dt} \bar{\rho}, \frac{d}{dt} \overline{(\rho u)}, \frac{d}{dt} \overline{(\rho e_o)} \right\}_i$$

Spatial Discretization - Summary

cell-averaged quantity

face-averaged quantity

source term


$$\frac{d}{dt} \bar{\rho}_i = \frac{1}{VOL_i} \left\{ \overline{(\rho u)}_{i-\frac{1}{2}} A_{i-\frac{1}{2}} - \overline{(\rho u)}_{i+\frac{1}{2}} A_{i+\frac{1}{2}} \right\}$$

$$\frac{d}{dt} \overline{(\rho u)}_i = \frac{1}{VOL_i} \left\{ \overline{(\rho u^2 + p)}_{i-\frac{1}{2}} A_{i-\frac{1}{2}} - \overline{(\rho u^2 + p)}_{i+\frac{1}{2}} A_{i+\frac{1}{2}} + \right.$$

$$\left. \bar{\rho}_i \left(A_{i+\frac{1}{2}} - A_{i-\frac{1}{2}} \right) \right\}$$

$$\frac{d}{dt} \overline{(\rho e_o)}_i = \frac{1}{VOL_i} \left\{ \overline{(\rho u h_o)}_{i-\frac{1}{2}} A_{i-\frac{1}{2}} - \overline{(\rho u h_o)}_{i+\frac{1}{2}} A_{i+\frac{1}{2}} \right\}$$

Roadmap - The Time-Marching Technique

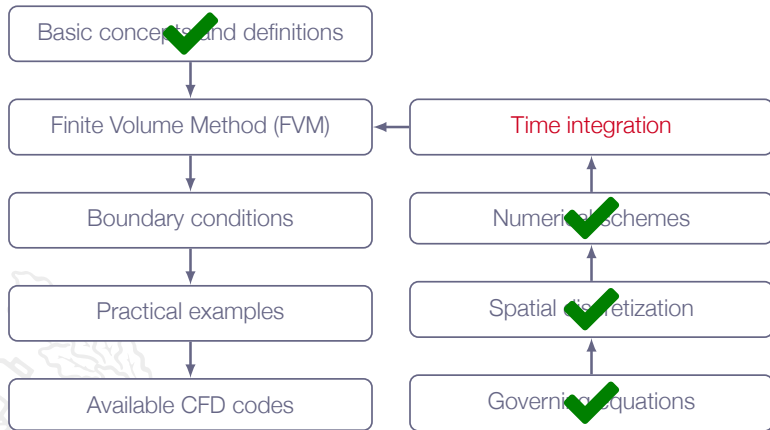

Time Stepping



Time Stepping

The system of ODEs obtained from the spatial discretization in vector notation

$$\frac{d}{dt}\mathbf{Q} = \mathbf{F}(\mathbf{Q})$$

- ▶ \mathbf{Q} is a vector containing all DOFs in all cells
- ▶ $\mathbf{F}(\mathbf{Q})$ is the **time derivative** of \mathbf{Q} resulting from above mentioned **flux approximations**
non-linear vector-valued function

Time Stepping

Three-stage Runge-Kutta - *one example of many:*

- ▶ **Explicit** time-marching scheme
- ▶ **Second-order** accurate



Time Stepping - Three-stage Runge-Kutta

$$\frac{d}{dt}\mathbf{Q} = \mathbf{F}(\mathbf{Q})$$

Let $\mathbf{Q}^n = \mathbf{Q}(t_n)$ and $\mathbf{Q}^{n+1} = \mathbf{Q}(t_{n+1})$

- ▶ t_n is the current time level and t_{n+1} is the next time level
- ▶ $\Delta t = t_{n+1} - t_n$ is the solver time step

Algorithm:

1. \mathbf{Q}^* = $\mathbf{Q}^n + \Delta t \mathbf{F}(\mathbf{Q}^n)$
2. \mathbf{Q}^{**} = $\mathbf{Q}^n + \frac{1}{2} \Delta t \mathbf{F}(\mathbf{Q}^n) + \frac{1}{2} \Delta t \mathbf{F}(\mathbf{Q}^*)$
3. \mathbf{Q}^{n+1} = $\mathbf{Q}^n + \frac{1}{2} \Delta t \mathbf{F}(\mathbf{Q}^n) + \frac{1}{2} \Delta t \mathbf{F}(\mathbf{Q}^{**})$

DOFs in all cells updated from time level t_n to time level t_{n+1} , repeat procedure for t_{n+2}, t_{n+3}, \dots

Time Stepping - Explicit Schemes

Properties of explicit time-stepping schemes:

- + **Easy to implement** in computer codes
- + **Efficient execution** on most computers
- + Easy to adapt for **parallel execution** on distributed memory systems (e.g. Linux clusters)
- **Time step limitation** (CFL number)
- Convergence to steady-state **often slow** (there are, however, some remedies for this)




Time Stepping - Explicit Schemes

Courant-Friedrich-Lewy (CFL) number - *one-dimensional case*:

$$CFL_i = \frac{\Delta t(|u_i| + a_i)}{\Delta x_i} \leq 1$$


Interpretation: The fastest characteristic (C^+ or C^-) must not travel longer than Δx during one time step

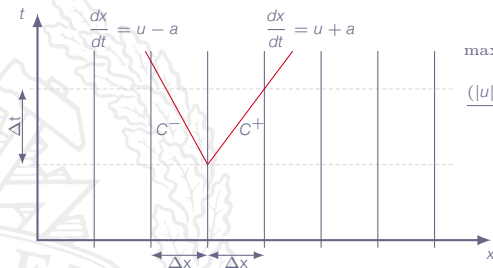

$$\max(|u - a|, |u + a|)\Delta t = (|u| + a)\Delta t \leq \Delta x \Rightarrow$$

$$\frac{(|u| + a)\Delta t}{\Delta x} = CFL \leq 1$$

Time Stepping - Explicit Schemes

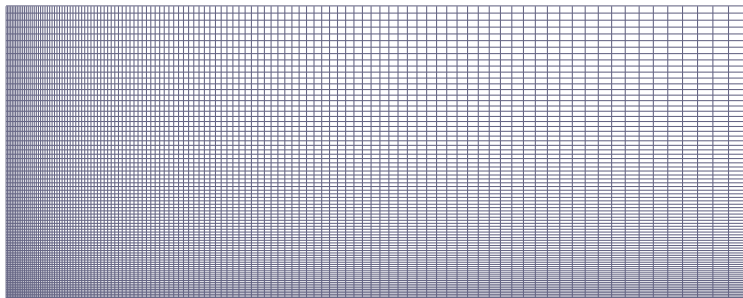

Steady-state problems:

- ▶ local time stepping
- ▶ each cell has an individual time step
- ▶ Δt_i maximum allowed value based on CFL criteria

Unsteady problems:

- ▶ time accurate
- ▶ all cells have the same time step
- ▶ $\Delta t_i = \min \{ \Delta t_1, \dots, \Delta t_N \}$

Explicit Finite-Volume Method - Summary

The described numerical scheme is an example of a **density-based, fully coupled** scheme



Explicit Finite-Volume Method - Summary

- ▶ **density-based** schemes
 - ▶ solve for density in the continuity equation
 - ▶ in general preferred for **high-Mach-number** flows and for **unsteady** compressible flows
- ▶ **pressure-based** schemes
 - ▶ the continuity and momentum equations are combined to form a pressure correction equation
 - ▶ were first used for incompressible flows but have been adapted for compressible flows also
 - ▶ quite popular for **steady-state subsonic/transonic** flows



Explicit Finite-Volume Method - Summary


- ▶ **fully-coupled** schemes
 - ▶ all equations (continuity, momentum, energy) are solved for simultaneously
- ▶ **segregated** schemes
 - ▶ alternate between the solution of the velocity field and the pressure field (pressure-based solver)



Explicit Finite-Volume Method - Summary

Spatial discretization:

- ▶ Control volume formulations of conservation equations are applied to the cells of the discretized domain
- ▶ **Cell-averaged** flow quantities $(\bar{\rho}, \bar{\rho\mathbf{U}}, \bar{\rho e_o})$ are chosen as degrees of freedom (DOFs)
- ▶ **Flux** terms are **approximated** in terms of the chosen DOFs
 - ▶ high-order, upwind type of flux approximation is used for optimum results
- ▶ A **fully conservative** scheme is obtained
 - ▶ the flux leaving one cell is identical to the flux entering the neighboring cell
- ▶ The result of the spatial discretization is a system of ODEs

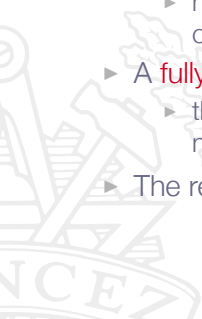

Explicit Finite-Volume Method - Summary

Time marching:


- ▶ Three-stage, second-order accurate Runge-Kutta scheme
 - ▶ **Explicit** time-stepping
 - ▶ Time step length **limited by the CFL condition** ($CFL \leq 1$)

Classification of numerical scheme:

- ▶ **density-based**
 - ▶ includes the continuity equation
- ▶ **fully coupled**
 - ▶ all equations are solved simultaneously



Roadmap - The Time-Marching Technique

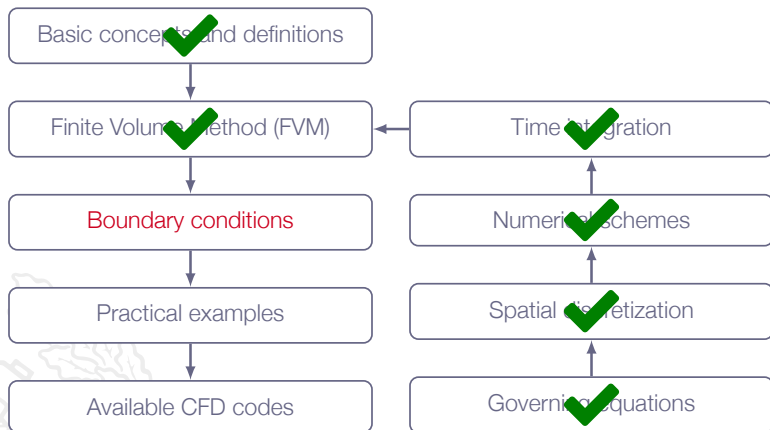

Boundary Conditions



Boundary Conditions


Boundary conditions are very important for numerical simulation of compressible flows

Main reason: both flow and acoustics involved!

Example 1:

Finite-volume CFD code for Quasi-1D compressible flow
(Time-marching procedure)


What boundary conditions should be applied at the left and right ends?

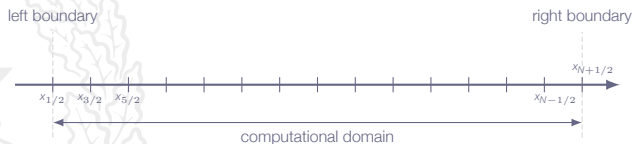

Boundary Conditions


three characteristics:

1. C^+
2. C^-
3. advection

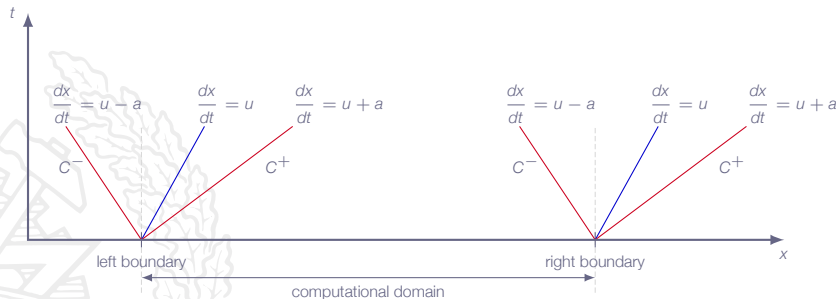

Boundary Conditions

- ▶ C^+ and C^- characteristics describe the transport of **isentropic pressure waves** (often referred to as **acoustics**)
- ▶ The advection characteristic simply describes the **transport** of certain quantities **with the fluid itself** (for example **entropy**)
- ▶ In one space dimension and time, these three characteristics, together with the quantities that are known to be constant along them, give a **complete description** of the time evolution of the flow
- ▶ We can use the characteristics as a guide to tell us what information that should be specify at the boundaries

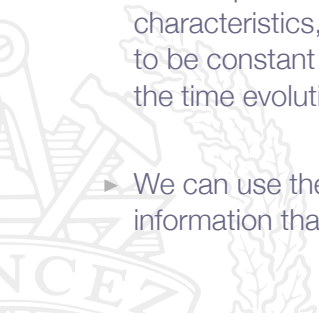

Left Boundary - Subsonic Inflow

we have three PDEs, and are solving for three unknowns


- ▶ Subsonic inflow: $0 < u < a$

$$u - a < 0$$

$$u > 0$$

$$u + a > 0$$

- ▶ one outgoing characteristic
- ▶ two ingoing characteristics
- ▶ Two variables should be specified at the boundary
- ▶ The third variable must be left free

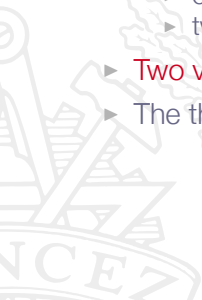

Left Boundary - Subsonic Outflow

we have three PDEs, and are solving for three unknowns


- ▶ Subsonic outflow: $-a < u < 0$

$$u - a < 0$$

$$u < 0$$

$$u + a > 0$$

- ▶ two outgoing characteristics
- ▶ one ingoing characteristic
- ▶ One variable should be specified at the boundary
- ▶ The second and third variables must be left free

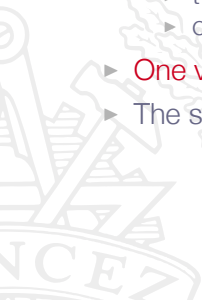

Left Boundary - Supersonic Inflow

we have three PDEs, and are solving for three unknowns

- ▶ Supersonic inflow: $u > a$

$$u - a > 0$$

$$u > 0$$

$$u + a > 0$$

- ▶ no outgoing characteristics
- ▶ three ingoing characteristics
- ▶ All three variables should be specified at the boundary
- ▶ No variables must be left free



Left Boundary - Supersonic Outflow

we have three PDEs, and are solving for three unknowns

- ▶ Supersonic outflow: $u < -a$

$$u - a < 0$$

$$u < 0$$

$$u + a < 0$$

- ▶ three outgoing characteristics
- ▶ no ingoing characteristics
- ▶ **No variables** should be **specified** at the boundary
- ▶ All variables must be left free



Right Boundary - Subsonic Outflow

we have three PDEs, and are solving for three unknowns

- ▶ Subsonic outflow: $0 < u < a$

$$u - a < 0$$

$$u > 0$$

$$u + a > 0$$

- ▶ one ingoing characteristic
- ▶ two outgoing characteristics
- ▶ One variable should be specified at the boundary
- ▶ The second and third variables must be left free



Right Boundary - Subsonic Inflow

we have three PDEs, and are solving for three unknowns


- ▶ Subsonic inflow: $-a < u < 0$

$$u - a < 0$$

$$u < 0$$

$$u + a > 0$$

- ▶ two ingoing characteristics
- ▶ one outgoing characteristic
- ▶ Two variables should be specified at the boundary
- ▶ The third variables must be left free

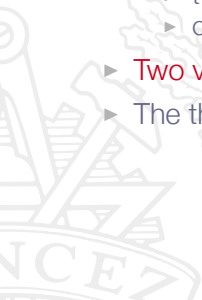

Right Boundary - Supersonic Outflow

we have three PDEs, and are solving for three unknowns

- ▶ Supersonic outflow: $u > a$

$$u - a > 0$$

$$u > 0$$

$$u + a > 0$$

- ▶ no ingoing characteristics
- ▶ three outgoing characteristics
- ▶ **No variables** should be **specified** at the boundary
- ▶ All three variables must be left free



Right Boundary - Supersonic Inflow

we have three PDEs, and are solving for three unknowns

- ▶ **Supersonic inflow:** $u < -a$

$$u - a < 0$$

$$u < 0$$

$$u + a < 0$$

- ▶ three ingoing characteristics
- ▶ no outgoing characteristics
- ▶ **All three variables** should be **specified** at the boundary
- ▶ No variables must be left free



Subsonic Inflow (Left Boundary) - Example

Subsonic inflow: we should specify two variables

Alt	specified variable 1	specified variable 2	well-posed	non-reflective
1	ρ_o	T_o	X	
2	ρu	T_o	X	
3	s	J^+	X	X

well posed:

- ▶ the problem has a solution
- ▶ the solution is unique
- ▶ the solution's behaviour changes continuously with initial conditions


Subsonic Outflow (Left Boundary) - Example

Subsonic outflow: we should specify one variable

Alt	specified variable	well-posed	non-reflective
1	ρ	X	
2	ρu	X	
3	J^+	X	X



Subsonic Inflow 2D/3D



\mathbf{n}	unit normal vector
\mathbf{v}	fluid velocity at boundary


Subsonic inflow

- ▶ Assumption:

$$-a < \mathbf{v} \cdot \mathbf{n} < 0$$

- ▶ Four ingoing characteristics
- ▶ One outgoing characteristic
- ▶ Specify four variables at the boundary:
 - ▶ example: p_o , T_o , flow direction (two angles)

Subsonic Outflow 2D/3D




\mathbf{n} unit normal vector
 \mathbf{v} fluid velocity at boundary

Subsonic outflow

- ▶ Assumption:
 $0 < \mathbf{v} \cdot \mathbf{n} < a$
- ▶ One ingoing characteristics
- ▶ Four outgoing characteristic
- ▶ Specify one variables at the boundary:
 - ▶ example: p


Supersonic Inflow 2D/3D



\mathbf{n}	unit normal vector
\mathbf{v}	fluid velocity at boundary

- ▶ Supersonic inflow
- ▶ Assumption:
 $\mathbf{v} \cdot \mathbf{n} < -a$
- ▶ Five ingoing characteristics
- ▶ No outgoing characteristics
- ▶ Specify five variables at the boundary:
 - ▶ all solver variables specified

Supersonic Outflow 2D/3D



\mathbf{n} unit normal vector
 \mathbf{v} fluid velocity at boundary


Supersonic outflow

- ▶ Assumption:

$$\mathbf{v} \cdot \mathbf{n} > a$$

- ▶ No ingoing characteristics
- ▶ Five outgoing characteristics
- ▶ No variables specified at the boundary:

Roadmap - The Time-Marching Technique

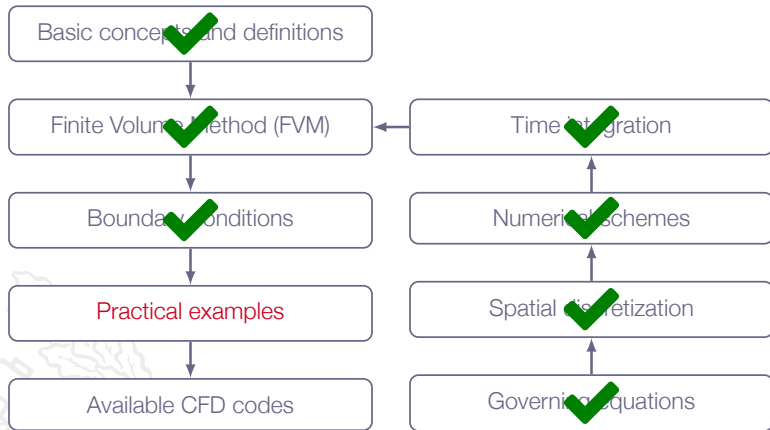

Practical Examples: Grid Resolution and Numerical Schemes



Numerical Approach


- ▶ Code: `G3D::Flow` (Chalmers in-house CFD code)
- ▶ **Finite-Volume Method**
- ▶ Method of lines
- ▶ Three-stage, **second-order** accurate **Runge-Kutta** time stepping
- ▶ First-order, second-order, and **third-order** characteristic upwinding scheme




Grid Resolution: Compression Ramp

coarse mesh


71 × 21



density




Mach number




medium mesh


141 × 41



density



Mach number



fine mesh


281 × 81



density




Mach number



Grid Resolution: Space Shuttle


coarse mesh

81×21

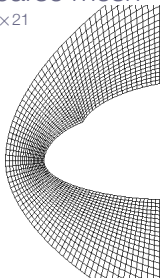

medium mesh

161×41

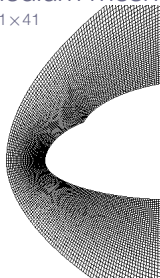


fine mesh


321×81




Mach number

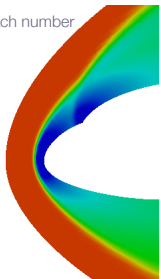

Mach number

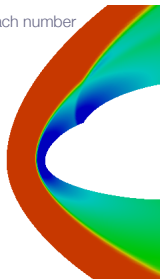


Mach number

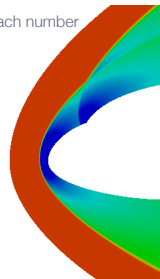

Grid Resolution: Axi-symmetric Slender Body


coarse mesh

31×21




medium mesh

61×41




fine mesh


121×81




density

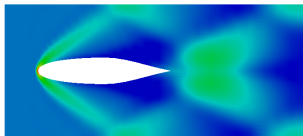


density

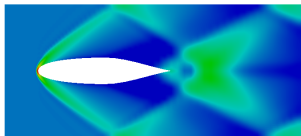


density

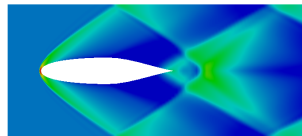


Mach number

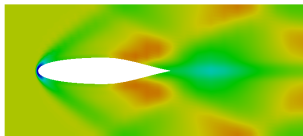

Mach number

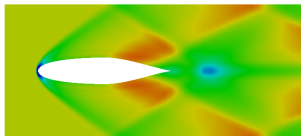


Mach number

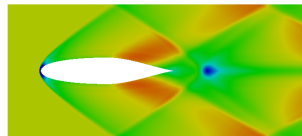

Numerical Scheme: Compression Ramp

first-order upwind

density



second-order upwind

density




third-order upwind


density




Mach number



Mach number




Mach number




Artificial Numerical Damping: Compression Ramp


Low artificial numerical damping

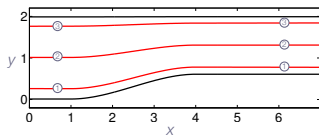


Mach number along line 1

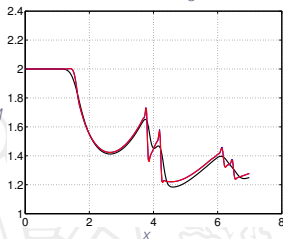

Mach number along line 2

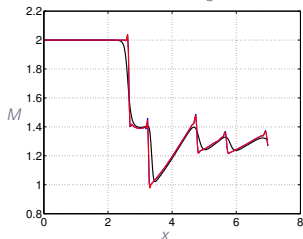


Mach number along line 3

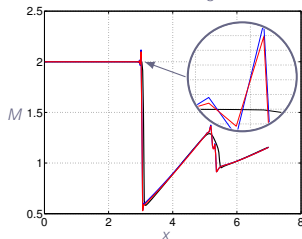


first-order upwind scheme
second-order upwind scheme
third-order upwind scheme

Artificial Numerical Damping: Compression Ramp


High artificial numerical damping

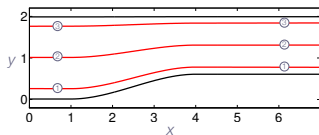


Mach number along line 1

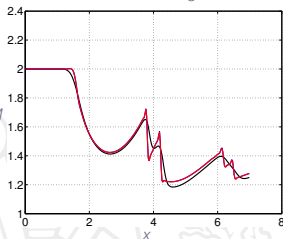

Mach number along line 2

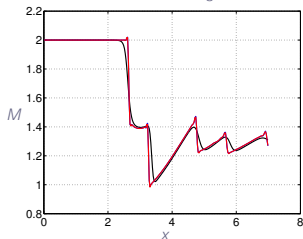


Mach number along line 3

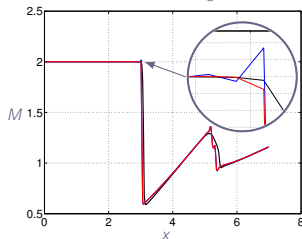

first-order upwind scheme
second-order upwind scheme
third-order upwind scheme

Roadmap - The Time-Marching Technique

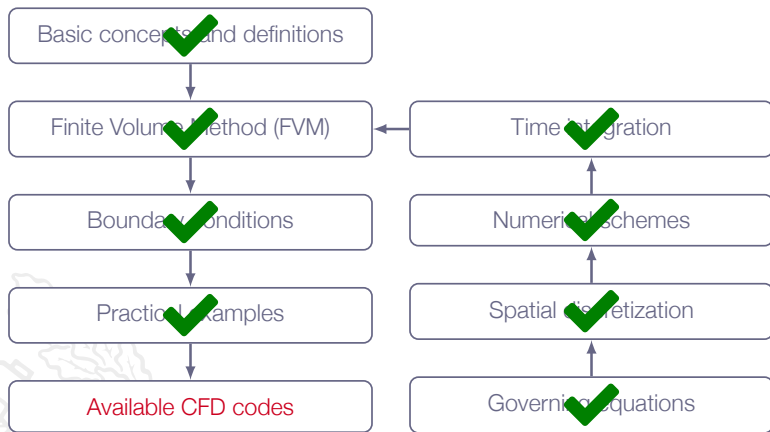

Available CFD Codes



CFD Codes

List of free and commercial CFD codes:

<http://www.cfd-online.com/Wiki/Codes>

- ▶ Free codes are in general unsupported and poorly documented
- ▶ Commercial codes are often claimed to be suitable for all types of flows


The reality is that the user must make sure of this!

- ▶ Industry/institute/university in-house codes not listed
 - ▶ non-commercial but proprietary
 - ▶ part of design/analysis system

CFD Codes - General Guidelines


Simulation of high-speed and/or unsteady compressible flows:

- ▶ Use correct solver options
otherwise you may obtain completely wrong solution!
- ▶ Use a high-quality grid
a poor grid will either not give you any solution at all (no convergence) or at best a very inaccurate solution!

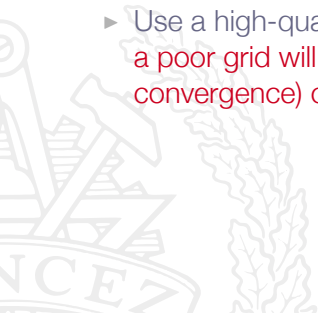

ANSYS-FLUENT® - Typical Experiences

- ▶ Very **robust solver** - will almost always give you a solution
- ▶ Accuracy of solution depends a lot on **grid quality**
- ▶ **Shocks** are generally **smeared** more than in specialized codes
- ▶ Solver is generally very **efficient** for **steady-state** problems
- ▶ Solver is less efficient for truly unsteady problems, where both flow and acoustics must be resolved accurately

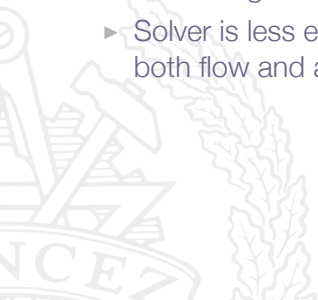

ANSYS-FLUENT[®] - Solver Options

- ▶ **Coupled** or **Density-based** *depends on version*
 - ▶ the continuity, momentum, energy equations are solved for simultaneously
just like in the Quasi-1D code discussed previously
- ▶ **Density = Ideal gas law**
 - ▶ the calorically perfect gas assumption is activated
 - ▶ the energy equation is activated
- ▶ **Explicit** or **Implicit** time stepping
 - ▶ **Explicit** recommended for unsteady compressible flows
CFL is set to 1 as default, but may be changed
 - ▶ **Implicit** more efficient for steady-state compressible flows
CFL is set to 5 as default, but may be changed

ANSYS-FLUENT[®] - Solver Features

Spatial discretization:

- ▶ Finite-Volume Method (FVM)
- ▶ Unstructured grids
- ▶ Fully conservative, density-based scheme
- ▶ Flux approximations:
first-order, second-order, upwind, ...
- ▶ Fully coupled solver approach

Explicit time stepping:

- ▶ Runge-Kutta time stepping

Implicit time stepping:

- ▶ Iterative solver based on Algebraic Multi-Grid (AGM)

Roadmap - The Time-Marching Technique

